


AIR FILTRATION  
& AIR QUALITY

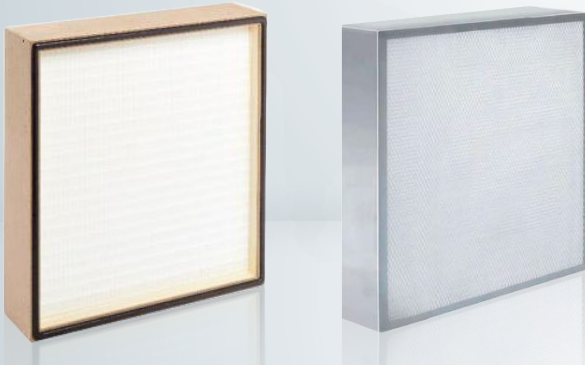

## HEPAFIL-150-MRL

Turbulent Flow Absolute Filters

### APPLICATIONS

- EPA-HEPA Filters absolute air filtration
- Clean room ventilation systems
- Used in microelectronics, food, photography, data centers, hospital, medical equipment industry

### FILTER CODE STRUCTURE

Type	<b>HF</b>	HEPAFIL-150
Class EN 1822	<b>10</b>	%95@0,3 μm
Frame	<b>M</b>	M: Wooden A: Aluminum G: Galvanized T: SS 304 S: SS 316
Media	<b>R</b>	R: Micro Glass Fibre S: Synthetic Y: High Heat
Pleat Depth	<b>L</b>	S: 0.55-1 inch K: 1-1.88 inch M: 1.9-2.28 inch N: 2.3-3 inch L: 3-3.94 inch E: 3.97-4.9 inch
Flange Type	<b>N</b>	N: Without Flange T: 1 inch Single Flange D: 1 inch Double Flange V: 0.78 inch Single Flange W: 0.78 inch Double Flange B: Custom Size
Surface Grid	<b>1</b>	0: Without Grid 1: Face Grid Air Outlet 2: Both Side with Grid
Gasket Type	<b>P</b>	P: Polyurethane X: Without Gasket R: Rubber E: EPDM Y: High Heat
Gasket Direction	<b>G</b>	X: No C: Air Outlet G: Air Inlet W: Both Sides
Size		25-25-6

### TECHNICAL SPECIFICATIONS

Efficiency @0.3 μm	95 %	99 %	99,9 %	99.99 %	99.999 %	99.9999 %
Max. Temperature	176 °F (Optional 248 °F)					
Relative Humidity	100 %					
Rec. Final Pres. Drop	2.4 w.g.					
Filter Stage	III - IV					

For more information please click here.

