


AIR FILTRATION  
& AIR QUALITY

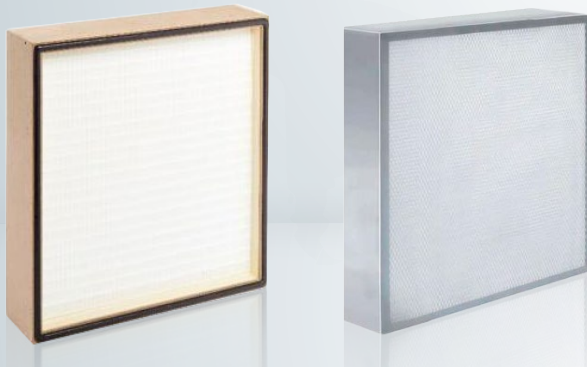

## HEPAFIL-150

Turbulent Flow Absolute Filters

### APPLICATIONS

- EPA-HEPA Filters absolute air filtration
- Clean room ventilation systems
- Used in microelectronics, food, photography, data centers, hospital, medical equipment industry

### FILTER CODE STRUCTURE

Type	<b>HF</b>	HEPAFIL
Class EN 1822	<b>12</b>	E12
Frame	<b>M</b>	<b>M:</b> Wooden <b>A:</b> Aluminum <b>G:</b> Galvanized <b>T:</b> SS 304 <b>S:</b> SS 316
Media	<b>R</b>	<b>R:</b> Micro Glass Fibre <b>Y:</b> High Heat (Max. 120 °C)
Pleat Depth	<b>M</b>	<b>K:</b> 48 mm <b>M:</b> 58 mm <b>N:</b> 75 mm <b>L:</b> 100 mm <b>E:</b> 135 mm
Flange Type	<b>N</b>	<b>N:</b> Without <b>T:</b> 25 mm Single <b>D:</b> 25 mm Double <b>V:</b> 20 mm Single <b>W:</b> 20 mm Double <b>B:</b> Custom Size
Surface Grid	<b>1</b>	<b>0:</b> Without Grid <b>1:</b> Face Grid Air Outlet <b>2:</b> Both Side with Grid
Gasket Type	<b>P</b>	<b>P:</b> Polyurethane <b>X:</b> Without Gasket <b>R:</b> Rubber <b>E:</b> EPDM <b>Y:</b> High Heat
Gasket Direction	<b>G</b>	<b>X:</b> No <b>C:</b> Air Outlet <b>G:</b> Air Inlet <b>W:</b> Both Sides
Size		0610-0610-150

### TECHNICAL SPECIFICATIONS

Efficiency @0.3 µm	95 %	99 %	99,9 %	99.99 %	99.999 %	99.9999 %
Max. Temperature	176 °F (Optional 248 °F)					
Relative Humidity	100 %					
Rec. Final Pres. Drop	2.4 w.g.					
Filter Stage	III - IV					

For more information please click here.

