


AIR FILTRATION
& AIR QUALITY

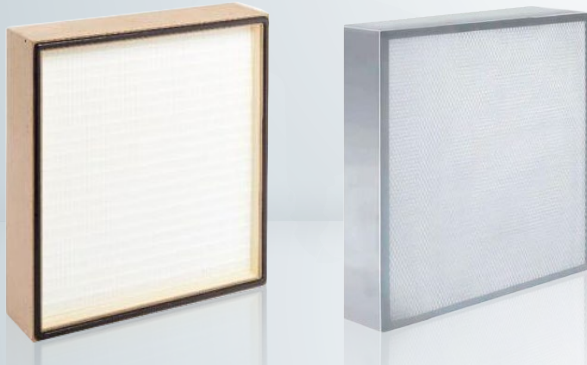

HEPAFIL-69

Turbulent Flow Absolute Filters

APPLICATIONS

- EPA-HEPA Filters absolute air filtration
- Clean room ventilation systems
- Used in microelectronics, food, photography, data centers, hospital, medical equipment industry

FILTER CODE STRUCTURE

Type	HF	HEPAFIL-69
Class EN 1822	12	%99,9 @0.3 µm
Frame	M	M: Wooden A: Aluminum G: Galvanized T: SS 304 S: SS 316
Media	R	R: Micro Glass Fibre S: Synthetic Y: High Heat
Pleat Depth	K	S: 0.55-1inch K: 1-1.88 inch
Flange Type	N	N: Without Flange T: 1inch Single Flange D: 1inch Double Flange V: 0.78 inch Single Flange W: 0.78 inch Double Flange B: Custom Size
Surface Grid	1	0: Without Grid 1: Face Grid Air Outlet 2: Both Side with Grid
Gasket Type	P	P: Polyurethane X: Without Gasket R: Rubber E: EPDM Y: High Heat
Gasket Direction	G	X: No C: Air Outlet G: Air Inlet W: Both Sides
Size		24-24-3

TECHNICAL SPECIFICATIONS

Efficiency @0.3 µm	95%	99%	99,9%	99.99%	99.999%	99.9999%
Max. Temperature	176 °F [Optional 248 °F]					
Relative Humidity	100 %					
Rec. Final Pres. Drop	2.4 w.g.					
Filter Stage	III - IV					

For more information please click here. 

