


AIR FILTRATION
& AIR QUALITY

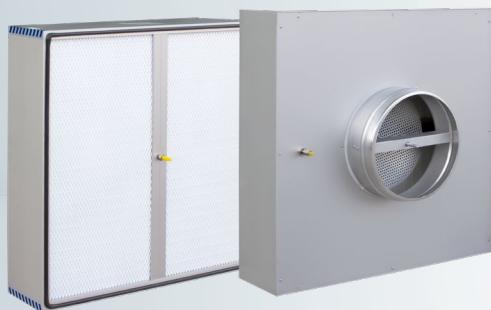

HEPAHOOD

Hepa Terminal Hood Filter

APPLICATIONS

Hepa-hood are used by pharmaceutical, electronics, food processing and other industries requiring a very hingh degree of clean air they are designed for use in laminar flow clean rooms the hoods are typically installed in an inverted T-bar grid suspended from the ceiling. When a unit reaches its maximum recommended resistance, the entire module is discarded

FILTER CODE STRUCTURE

Type	HH	HEPAHOOD
Class EN1822	13	%99.99 @0.3 µm
Frame	A	A: Aluminum M: Wooden G: Galvanized T: SS 304 S: SS 316
Media	R	Micro Glass Fibre
Air Inlet Connection	T	T: Single Spigot D: Double Spigot
Hardware Type	U	U: Flat Surface / Fixed Disk / Back Cover With DOP & Pa Prob F: Flat Surface / Fixed Disk / Back Cover With 1 Pneumatic Prob S: Divided Surface / Fixed Disk / CRS With DOP Prob W: Divided Surface / Adjustable Disk Control CRS / Back Cover With DOP & Pa Prob D: Divided Surface / Butterfly Damper Control CRS / Back Cover With 1 Pneumatic Prob & RS DOP Prob
Connection Diameter	25	25: 9.85 inch 20: 7.78 inch 15: 5.90 inch
Gasket Type	P	P: Polyurethane X: Without Gasket E: EPDM R: Rubber
Size	24-24-6	

TECHNICAL SPECIFICATIONS

Efficiency @0.3 µm	95 %	99 %	99,9 %	99.99 %	99.999 %
Max. Temperature	176 °F [Optional 248 °F]				
Relative Humidity	100 %				
Rec. Final Pres. Drop	2.4w.g.				
Filter Stage	III - IV				

For more information please click here.