FINE FILTERS

AIR FILTRATION
& AIR QUALITY

MGT AIR FILTERS

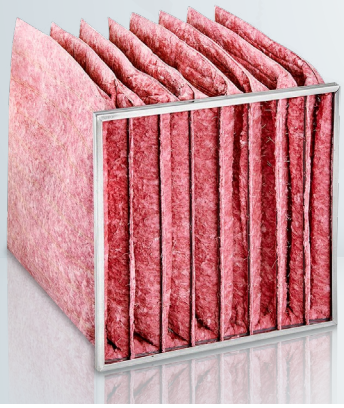

MULTIBAG-635

Glass Fiber Pocket Filters

APPLICATIONS

- In ventilation and air conditioning systems
- Fine filtering keeps airborne particles and aerosols
- Rigid pocket structure provides high filtration
- Large filtration surface, high flow rate, low initial pressure drop
- Optional 360 mm depth

FILTER CODE STRUCTURE

Type	**MB**	MULTIBAG
Filter Class ASHRAE 52.2	**7**	MERV 13
Frame	**G**	G: Galvanized P: Plastic (Black - 1 inch) T: SS 304 S: SS 316 V: One Piece Plastic (1 inch)
Header Thickness	**25**	25: 1 inch 20: 0.78 inch
Media	**F**	F: Glass Fiber
Pocket Number	**08**	8 Pockets
Gasket Type	**X**	X: Without Gasket P: Polyurethane R: Rubber E: EPDM
Gasket Direction	**X**	X: No C: Air Oulet G: Air Inlet W: Both Sides
Size		24-24-25

Fire Resistance Class K1/F1 According to DIN53438

TECHNICAL SPECIFICATIONS

ASHRAE 52.2			
Class	MERV 11-12	MERV 13	MERV 14
Average Efficiency	80%≤E2	50%≤E1	75%≤E1

Max. Temperature	176° F
Relative Humidity	100 %
Rec. Final Pres. Drop	Initial Pressure Drop x 2
Filter Stage	II - III

For more information please click here.

EUROVENT CERTIFIED PERFORMANCE www.eurovent-certification.com | ASHRAE | NAFA National Air Filtration Association | CE | EN 779: 2012 | ISO 16890 | ISO 9001 | EC 1935: 2004 | VDI 6022